

Measure once, order with confidence

Choose the fixing position, measure in millimetres and record each blind below.

1 Choose your fit

INSIDE OPENING

Channels fit between solid side supports.

Use the clear TOP opening width.

Check the headbox and landing positions.


FACE FIT

Allow 50 mm channel + 10 mm each side.

TOP opening width + 120 mm minimum.

Allow more for sound fixing beyond brick edges.

2 Measure the opening

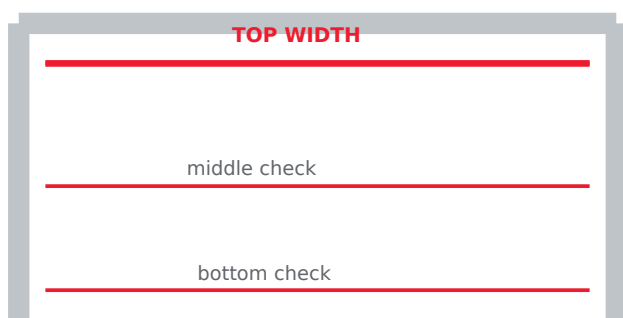

WIDTH

Order from the TOP width.

Check middle and bottom. If either differs by 13 mm or more, contact us first.

DROP

Measure left, centre and right to landing.

Enter the LONGEST drop on product page.

CHECK FIRST

Solid fixing on both sides and above; check level, obstacles and floor slope.

If width varies by 13 mm or more, send photos and measurements before ordering.

3 Record each blind

One row per opening. Enter TOP width and the LONGEST of the three drops online.

Location	Top width	Drop left	Drop centre	Drop right
1				
2				
3				
4				

Fit: ☐ Inside opening ☐ Face fit

Control side: ☐ Left ☐ Right

Headbox fixing: _____ Side fixing: _____

BRICK EDGES - CHECK THE FIXING

Fix in sound brick, clear of joints. Leave at least half a brick between fixing and wall edge, subject to anchor instructions. If too close, consider angles fixed farther into sound masonry. Need help? Contact Blindmotion Online.